

TEDDICO
ELECTRICAL PRODUCTS



LED BULBS



c  US LISTED    RoHS LM79 LM80

Specifications

Power	16w 22w 27w 36w 45w 54w 65w 75w 100w
LED Type	Epistar 2835 or Samsung 2835
Lumen Per Watt	120-130 lm/w
Input Voltage	AC 100-277V, 50-60Hz
Base	E26, E39
Surge Protection	16w-75w:6KV, 100w-120w:10KV
Beam Angle	360°
CCT	5000K (16w available in red or blue color)
CRI	>80
Power Factor	>0.9
Life Span	50,000 Hours
Certificates	DLC, UL, cUL, CE, ROHS



50,000 hours lamp life



Up to 80% direct energy saving



Samsung/Epistar



Rubycon



6KV Surge Protection



Silicone gaskets

Pictures




Data

Model NO.	Watt(w)	CCT	Lumen(lm)	LED QTY	Dimensions(mm)	CTN. QTY
*LK-K15-16W	16	5000K	2080	55	Φ 60*H167	1
LK-K15-22W	22	5000K	2860	66	Φ 60*H182	1
LK-K15-27W	27	5000K	3510	108	Φ 95*H190	1
LK-K15-36W	36	5000K	4680	130	Φ 95*H215	1
LK-K15-45W	45	5000K	5850	165	Φ 95*H240	1
LK-K15-54W	54	5000K	7020	200	Φ 95*H265	1
LK-K15-65W	65	5000K	8450	240	Φ 95*H310	1
LK-K15-75W	75	5000K	9750	290	Φ 140*H225	1
LK-K15-100W	100	5000K	13,000	380	Φ 140*H250	1

* 16W stocked in Red or Blue LEDs: LK-K15-16WR or LK-K15-16WB

Features

- 6KV or 10KV Surge protection
- Socket Position: Universal
- Silicone gasket for heat durability and superior waterproofing
- 3mm gap between LED and driver for better heat dissipation
- 4mm gap between heat sink and junction plate allows cool air circulation
- Holes on top and bottom to aid air convection regardless of base position
- Rated for use in enclosed fixtures
- Aviation aluminum 6063 heat sink, flame retardant V0 PC, American Dow Corning, Rubycon capacitor

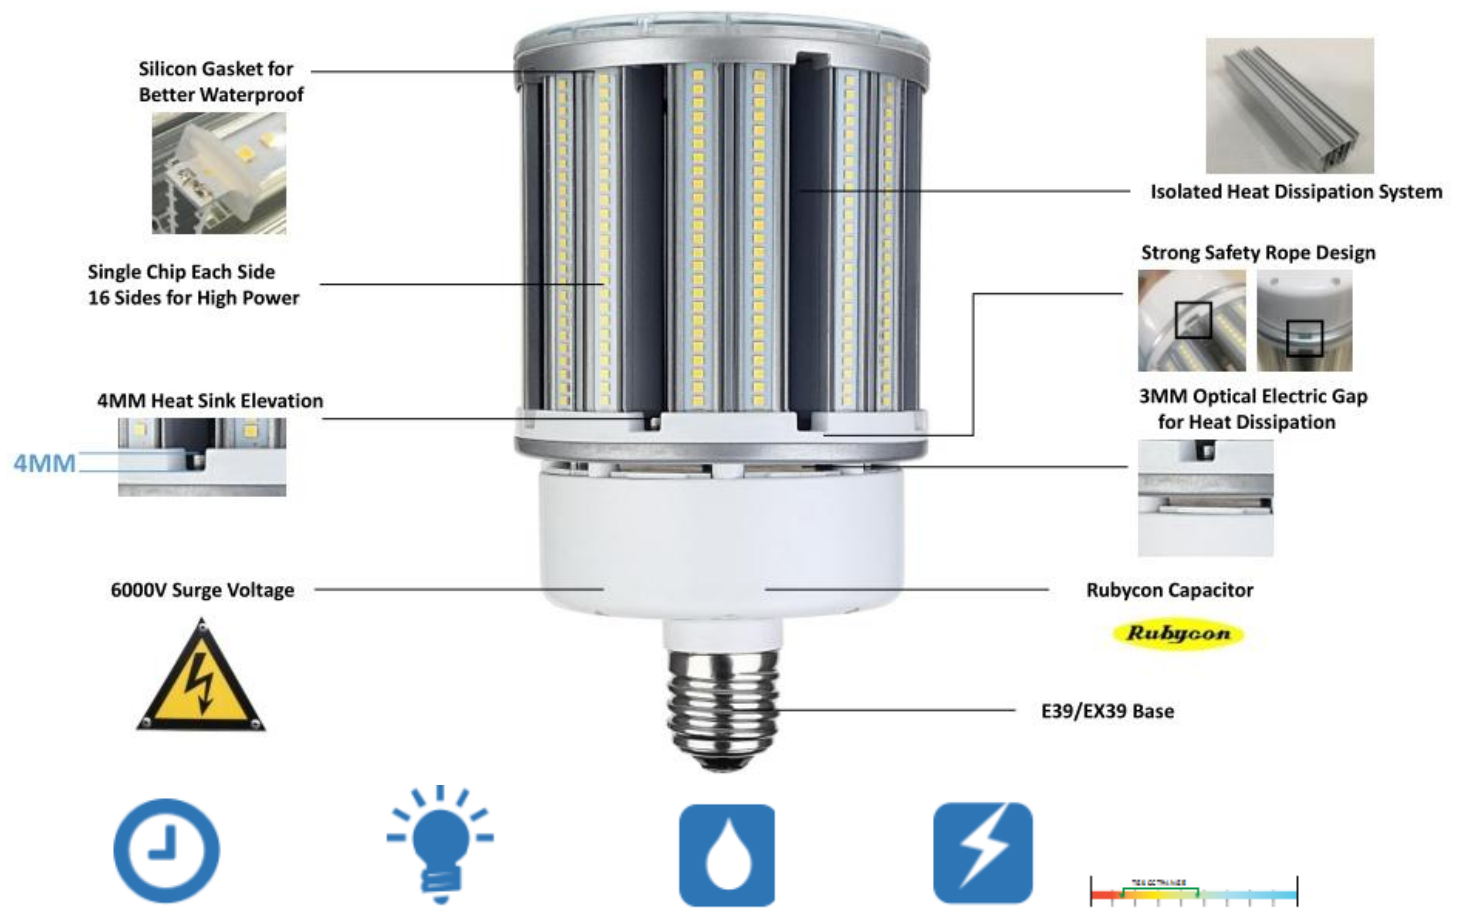

Application





A Leading Manufacturer of Weatherproof Electrical Products